


2000 Series

Standard Duty SVR Exit Device

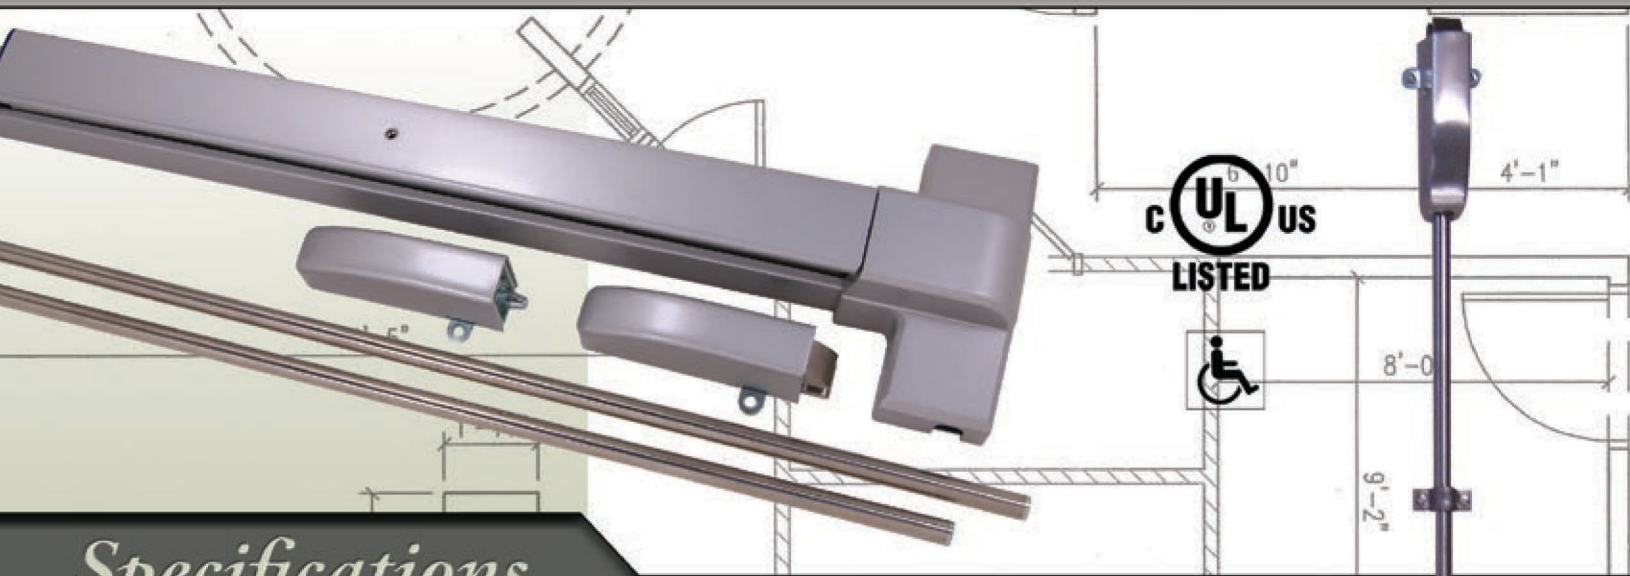

Specifications

ANSI : Meets & Exceeds ANSI A156.3 - Grade 1 Standards

UL Listings : UL Listed for Panic Exit Hardware

3 Hour Fire Doors to 8'-0" x 10'-0" & LBR up to 8'-0" x 8'-0"

ADA : Meets ADA requirements ANSI A117.1 with Lever Trim

Handing : Easily Re-handed in the field - Shipped as RHR

Construction : Roll Formed Steel or Stainless Steel Channel & Steel Chassis
Steel or Stainless Steel Head Cover & End Cap

Finishes : Aluminum, Dark Bronze, Gold Painted & US32D

Top Latch : U Shaped Top Latch for Secure Engagement with strike

Bottom Latch : Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor

Dogging : 5/32" Hex Key Dogging Standard on Panic Exit Hardware

Device Lengths : 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors

Min. Door Width : 33" & 42" devices can be cut down to fit on minimum door width of 2'-4"

Door Heights : 7'-0" Standard - Extended Top Rods available for up to 10'-0" tall doors

Center Case Dim. : 6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required

Mechanism Case Dim. : 1 5/8" Height x 1 13/16" Wide

Projection : 2 1/2" Undogged - Pushbar Neutral & 1 13/16" Dogged - Pushbar Depressed

Fasteners : Wood, Machine & Self Tapping Machine Screws (F2000V includes thru bolts)

Trim & Accessories : Latch filler included, Exterior Trims, Shim Kits other accessories available

Under Cut : 1/4" door under cut recommended for 1/4" threshold or no threshold openings

Warranty : Limited Lifetime Warranty