


TP Trim Thumbpiece Pull Trim

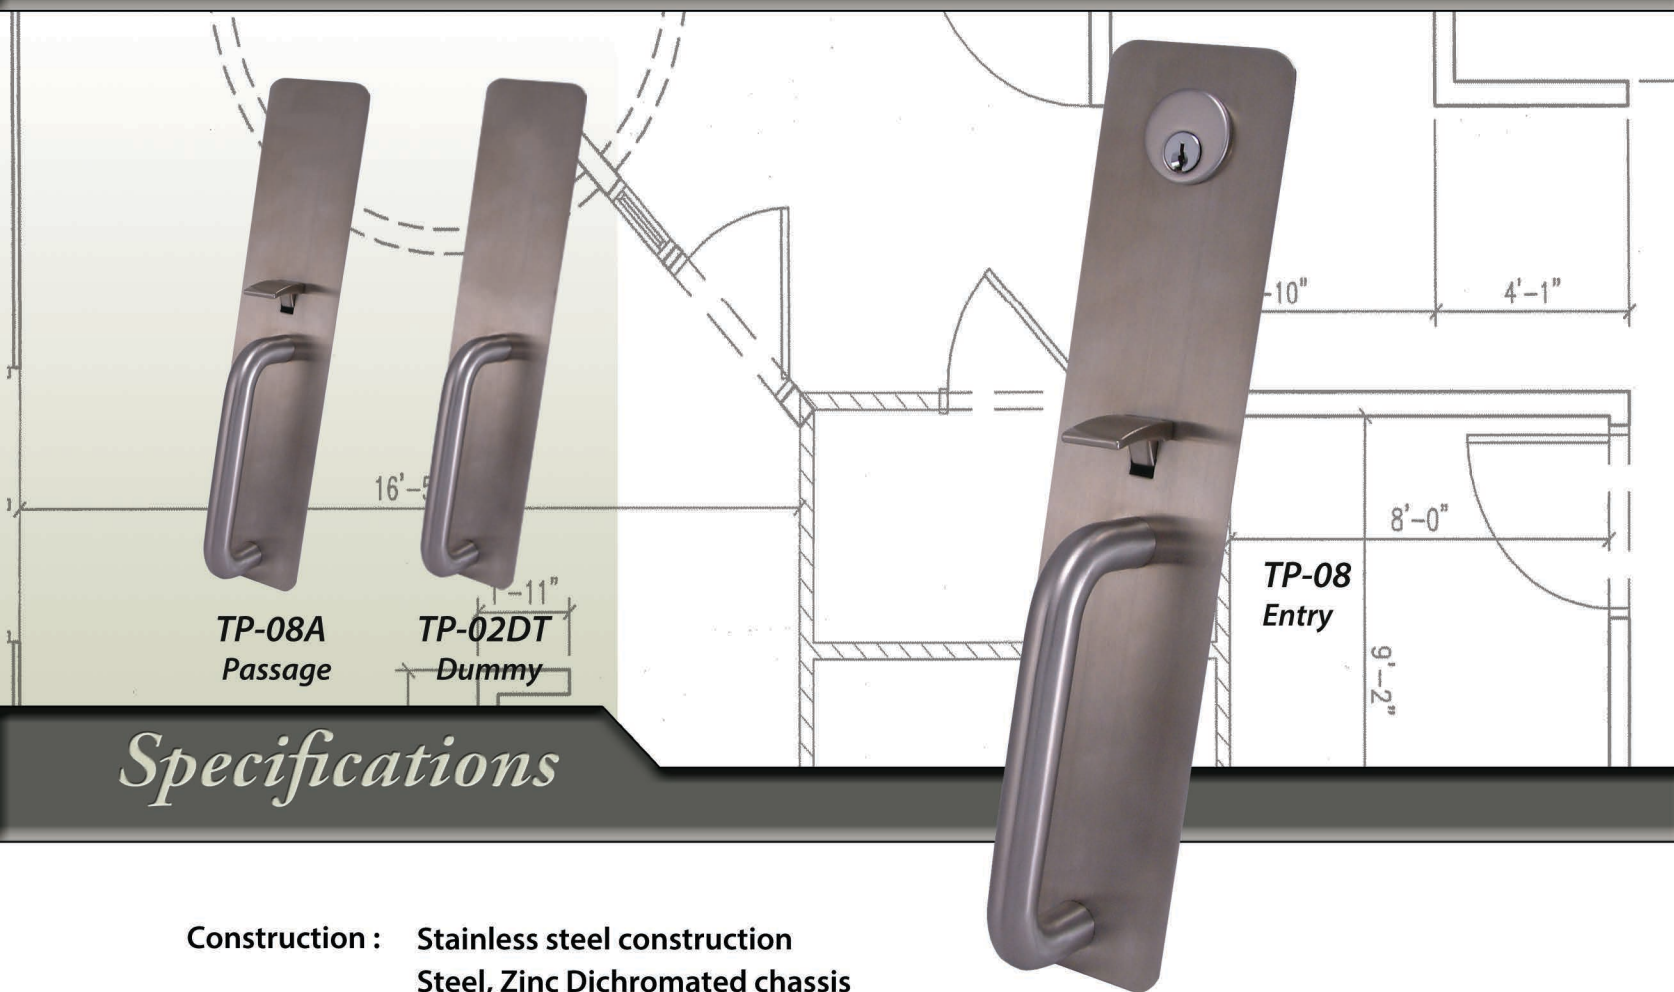

Specifications

- Construction :** Stainless steel construction
Steel, Zinc Dichromated chassis
- Pull Plate :** 3" Wide x 13 3/4" Height x 1/16" thick
- Pull :** 3/4" diameter hollow x 6" ctc x 2 7/16" projection
- Application :** Pull trim with thumbpiece control option for 1000R & 2000R
(Not recommended for SVR devices as rods can be hard to lift with thumbpiece)
- Mounting :** Thru bolted design thru bolts to head of exit device and to door with finish washer. Will cover 161 door prep
- Handing :** Non-handed
- Door Thickness :** 1 3/4" standard - Add the suffix -TD for 2" thick door
- Functions :** 02DT Dummy, 08 Entry, 08A Passage
- Standard Cylinder :** 1 1/4" Mortise cylinder with std. cam (included) - 6 Pin Brass, C Kwy, with 2 Keys
- Optional Cylinders :** 1 3/8" Mortise cylinder housing for 6 or 7 pin Small format IC core (less core)
- Optional Keyways :** 11 Popular competitor keyways available with replacement cylinders
- Finishes :** US3, US4, US10B, US26, US32D
- Warranty :** Limited lifetime warranty