


LADDER POST - LP-4 & LP-5 - RUNG MOUNTED, BOXED, MILD STEEL

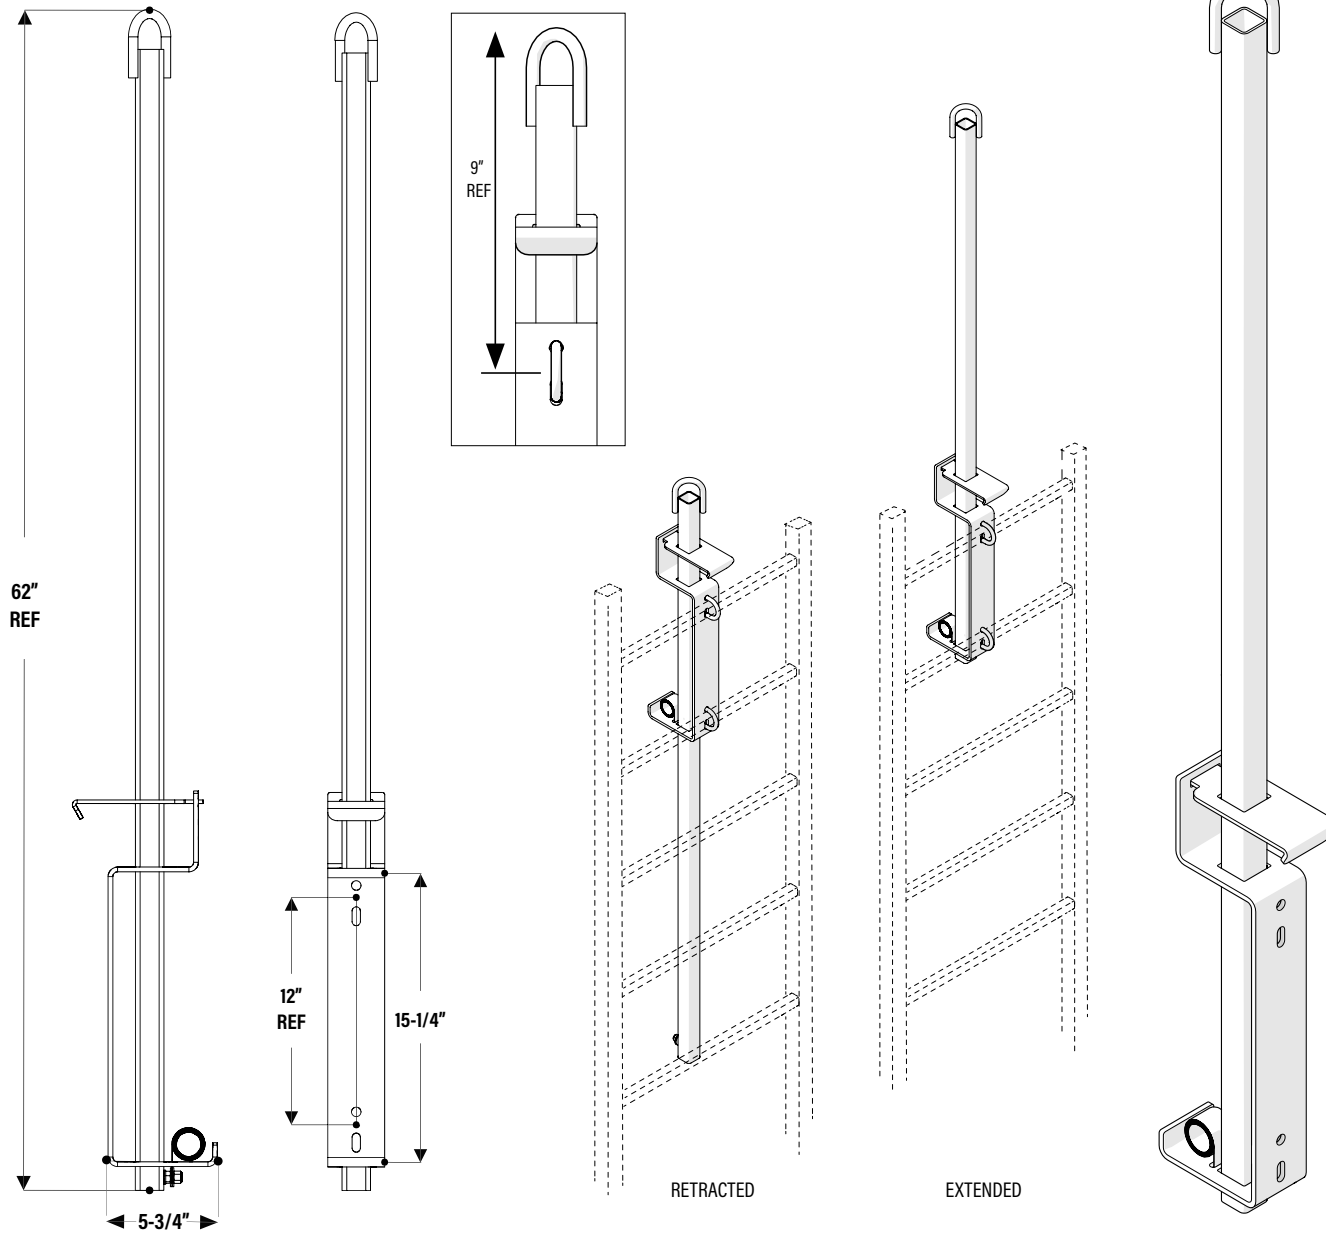

SPECIFICATIONS:


- Post Material: Mild steel square tubing 1-1/2" x 1-1/2" x 1/8"
- Locking Bracket Material: .20" Steel Plate
- Clamping Bracket Material: .25" Steel Plate
- Finish:
 - LP-4: Yellow powder coat
 - LP-5: Hot dip galvanized
- Spring Type: Stainless steel constant force power spring
- Hardware kit included: Zinc-plated steel U bolts, 3/8" zinc plated steel nylon insert locknuts and washers
- Ladder Requirements: Round or square rungs in sizes 3/4" - 1-1/4" spaced 12" apart. When mounted, the rung centers must allow at least a 7" foot clearance, as required by OSHA.
- Weight: 25 LBS

NOTES:

The ladder post is furnished completely assembled ready to mount on a fixed vertical ladder that is structurally sound and securely anchored.

Important: Use top loop for raising and pulling up the post only. It is not suitable for attaching a safety fall arrest harness and should not be used for this purpose.

QTY	MODEL	MATERIAL	TYPE
	LP-4	Steel	Yellow Powder coat
	LP-5	Steel	Hot Dip Galvanized



9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide
 800-554-6077 952-835-2218 sales@activarcpg.com www.activarcpg.com

Distributor:	Project:
Contractor:	Approved By:
Date:	Architect:
Scale: N/A	Pages: 1 of 1
	Item #:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.