


ADJUSTABLE Z-BLADE LOUVER: 1100 SERIES REV A

L7

Manually-Operated Adjustable Louver for Doors, Transoms and Partitions



1100A
Photo &
Drawing

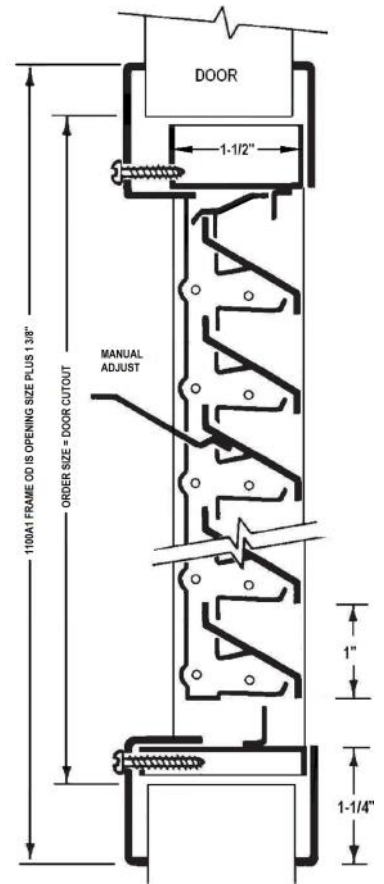

SPECIFICATIONS:

Material:	16 gauge CRS frame and louver. Min size 8" x 6", Max 24" x 36".
Construction:	Louver: Z-blades riveted to operating bar and frame at 1" intervals in 1-1/2" deep welded frame. Mechanical stop holds blades open. 1100A Frame: Mitered and welded corners; screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners. CORE & 1100C: 1/2" stop on top, 1/4" on bottom and 3/8" on sides.
Operation:	Manually-adjustable on interior face unless otherwise specified.
Door:	_____ 1-3/8"-1 3/4" - Any Style. Door cutout = order size.
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	Phillips head screws #8 x 3/4" to match finish.
Powder Coat Finishes:	_____ (B) Mineral Bronze (standard color) _____ (G) Gray _____ (BK) Black _____ (FBK) Flat Black _____ (W) White _____ (SB) SC Beige _____ (SI) Silver _____ (S) Sand _____ (AB) AMS Beige _____ (BRA) Brass Color Samples Online
Free Flow Area:	45% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	_____ (S) 18 gauge stainless steel, #4 finish _____ (E) Electro Galvanized for corrosion resistance & exterior use .
Fasteners:	_____ Torx _____ Other: _____
Screen:	_____ 18x14 mesh insect screen installed in roll formed aluminum frame on corridor side of louver. _____ aluminum _____ bronze _____ fiberglass _____ stainless
Custom:	Custom sizes, other door thicknesses— contact customer service.

Order Format: 1100
Example: 1100A 1212R A,CORE,C Option S,E W H Color

DOOR MOUNTING OPTIONS - SELECT ONE	
1100A: Self-attaching, blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side: frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	
1100 CORE: Basic blade unit only; for interior door or as transom louver held in place with wood or metal moulding (by others); any door size.	
1100C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door	

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1901
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218 VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION © 2019 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC Mfg: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		