



Stormproof Aluminum "Z" Blades Incorporate a Water Baffle, Suitable for Exterior Applications Where Weather Protection is Required. Available with Insect or Bird Screen.

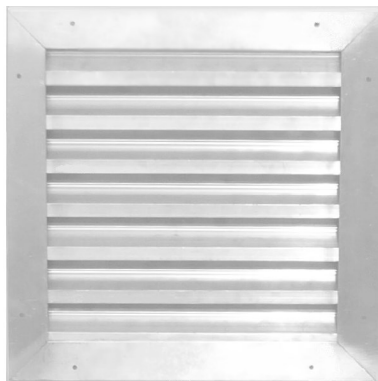

1400A
Mounting
Shown in
Photo and
Drawing

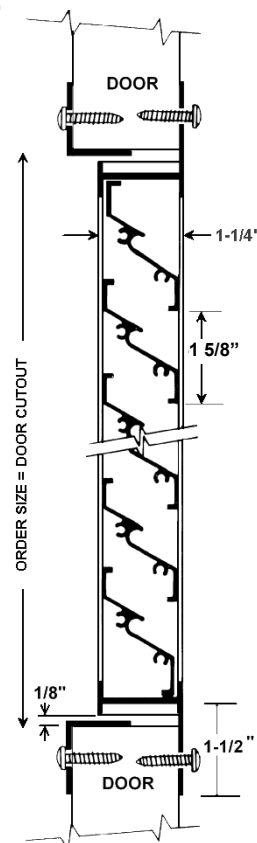

SPECIFICATIONS:

Material:	.063" thick 6063-T5 extruded aluminum. Min size 8" x 8", Max 36" x 80".	
Construction:	Louver: "Z" blades with water baffle at 1-5/8" intervals are screwed into the 1-1/4" deep frame. Non-vision design. 1400A Frame: 1/2" trim with reinforced mitered corners. Louver frame is screwed into door from 2 sides.	
Door:	_____ 1 3/8"-1 3/4" - Any Style.	Door cutout = order size.
Mounting Options:	_____ Select one mounting option from table below.	
Fasteners:	#8 x 3/4" Hex head screws to match finish.	
Finish:	Mill finish aluminum.	
Free Flow Area:	35% free area.	

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Fasteners:	_____ Torx _____ Other: _____
Screen:	_____ Insect Screen: 18 x14 mesh installed in roll-formed aluminum frame. _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
Custom:	Custom sizes, other door thicknesses— contact customer service.

Order Format:	1400 _____
Example: 1400C 1212	A,CORE,C _____ W _____ H _____

DOOR MOUNTING OPTIONS - SELECT ONE	
<p>1400A: (Shown Above) Basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".</p>	
<p>1400 CORE: Basic blade unit only; for interior doors; or as transom louver held in place with wood or metal moulding (furnished by others); any door size.</p>	
<p>1400C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door.</p>	

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1901
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218</p> <p>Visit WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION © 2019 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE</p>		